



Kawasaki Mule Pro-FX Cab - A/C Ready p/n's: 1KAPFXCA-AC & 1KAPFXCAS1-AC fits all Mule Pro 3-passenger models

While this cab kit was designed to fit on the vehicle(s) listed above, manufacturing tolerances and vehicle assembly may affect cab fitment. It is the responsibility of the cab installer to check all vehicle pedals and levers for full functionality and, as required, adjust the cab fitment to prevent any interference of the cab components with the travel of pedals or levers.



Shown with optional front LED work lights, 4-way flashers, windshield wiper, and side view mirrors.

Available Options:

- Front Wiper Kit (1KAPFXWK)*
- Front LED Work Lights (P/N: 1KAPFXFWL)*
- Rear LED Work Lights (P/N: 1KAPFXRWL)*
- LED Corner Flasher Light Kit (P/N: 1KAPFXCFL)*
- Strobe Light (P/N: 9LEDS2)*
- Interior Dome Light (P/N 9LEDD14)*
- Heater (P/N: 9PH20S61)
- Side View Mirrors (P/N: 9PM5)
- Rear View Mirror (P/N: 9PM3)
- Fuse Panel Kit (P/N 1KAPFXFP)

* Requires Curtis (P/N 1KAPFXFP) or Kawasaki (P/N KAF080-076) Fuse Panel Kit.

Approximate Installation Time *

Experienced Dealer Technician – 3.5 Hours
Average Dealer Technician – 4.5 Hours
Do-It-Yourself – 5.5 Hours

(*=Not including accessories)

Approximate Product Specifications

Ground to Top of Air Conditioner: 74 inches
Weight: 293 lbs.
Cab Width: 65 1/2"

The contents of this envelope are the property of the owner. Leave with the owner when installation is complete.


Rev. A, 07/25/2019

p/n: IM-1KAPFXCA-AC


KAWASAKI PRO-FX CAB SERVICE PARTS

P/N 1KAPFXCA-AC + 1KAPFXCAS1-AC


A/C ROOF KIT
P/N: 1ACKAPFXDXRFK

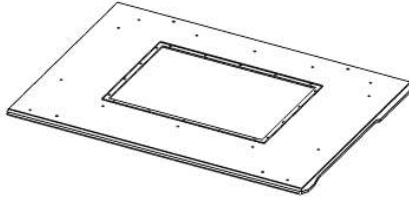


WINDSHIELD ASSEMBLY
POLY. W/S: P/N: 8SV-102-00011
GLASS W/S: P/N: 8SV-102-00020

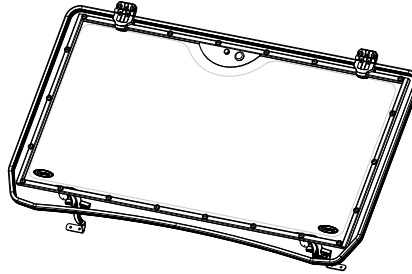


WINDSHIELD SUPPORT ASSEMBLY
P/N: 8SV-103-00006

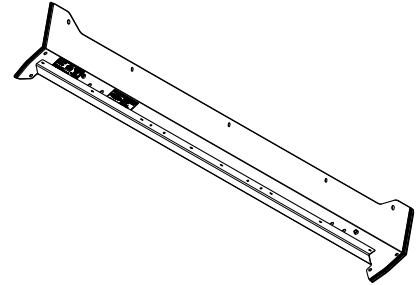


A-PILLAR, LEFT
P/N: 8SV-104-00005-L




A-PILLAR, RIGHT
P/N: 8SV-104-00005-R




COWL ASSEMBLY
POLY. W/S: P/N: 8SV-105-00008
GLASS W/S: P/N: 8SV-105-00012

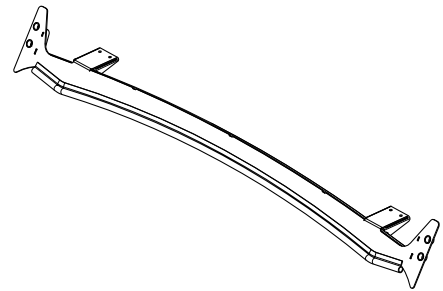


REAR PANEL ASSEMBLY, UPPER
P/N: 8SV-106-00011

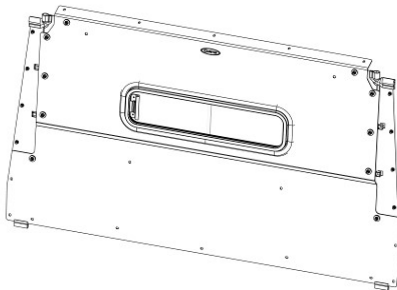


REAR PANEL ASSEMBLY, LOWER
P/N: 8SV-111-00007

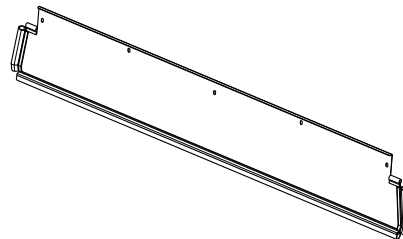


DOOR, LEFT
P/N: 8SV-107-00009-L




DOOR, RIGHT
P/N: 8SV-107-00010-R



REAR LEG ASSEMBLY, LEFT
P/N: 8SV-108-00005-L




REAR LEG ASSEMBLY, RIGHT
P/N: 8SV-108-00005-R




KAWASAKI PRO-FX CAB SERVICE PARTS P/N 1KAPFXCA-AC + 1KAPFXCAS1-AC


BRACKET, B-PILLAR ROPS, LEFT
P/N: 8SV-110-00024-L

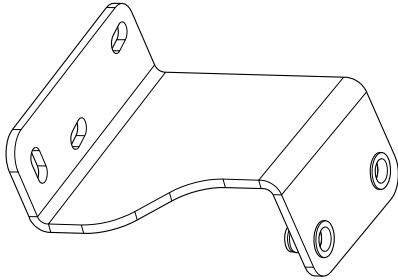


BRACKET, B-PILLAR ROPS, RIGHT
P/N: 8SV-110-00024-R

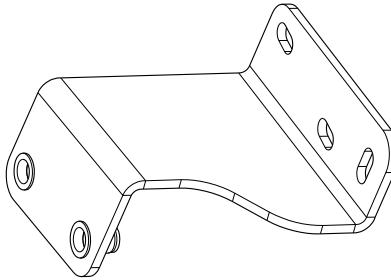


FUEL COVER PANEL
P/N: 8SV-111-00002




HEADER, LEFT
P/N: 8SV-113-00024-L

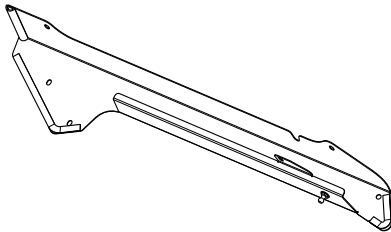

HEADER, RIGHT
P/N: 8SV-113-00024-R

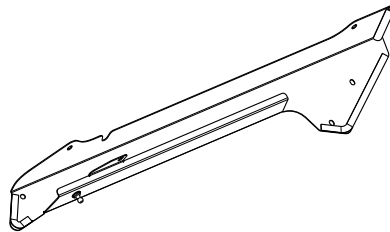


A-PILLAR WINDOW ASS'Y, LEFT
P/N: 8SV-9GL-00017-L




A-PILLAR WINDOW ASS'Y, RIGHT
P/N: 8SV-9GL-00017-R




SLIDING WINDOW, LEFT
P/N: 8SV-9SW-00007-L




SLIDING WINDOW, RIGHT
P/N: 8SV-9SW-00007-R




A-PILLAR BRACKET
P/N: 8SV-SM-00223



WINDSHIELD (POLYCARBONATE WINDOW ONLY)
W/ HARDWARE: P/N: 8SV-P-00019

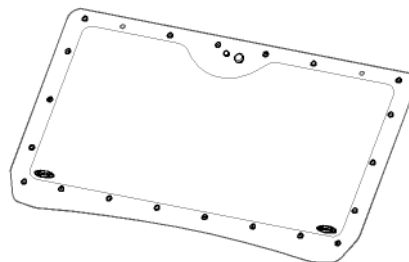


SLIDING WINDOW, REAR
P/N: 8SV-SWPFXP

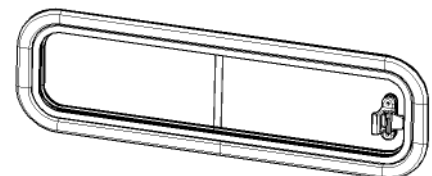















ADDITIONAL SERVICE PARTS

DOOR HINGE KIT
P/N: 8SV-PL-00001




PART NUMBER	DESCRIPTION
9SV-HWK-00028	HARDWARE KIT
8SV-VKDRT-B4	DOOR WINDOW TAB, (SET OF 4)
8SV-WL3	WINDSHIELD LATCH KIT (1 SET, L&R)
9SV-DL03	DOOR LATCH KIT NON-LOCKING WITH GRAB HANDLE (L & R)
9SV-DSTRH	DOOR STRIKER KIT-INCLUDES CASE HARDENED STRIKER BOLT
9SV-GS02A	BALL STUDS, 10MM (BAG OF 10)
9SV-GS02Q	GAS SPRING - 12" W/QUICK RELEASE END (SET OF 2) (FOR GLASS WINDSHIELD ONLY)
9SV-GS12Q	GAS SPRING, 20", 30 LBS W/QUICK RELEASE END (SET OF 2) (FOR DOORS)
9SV-HWS	WINDSHIELD HINGE KIT - POLYCARBONATE WINDSHIELD
9SV-HWSAS1	WINDSHIELD HINGE KIT - GLASS WINDSHIELD
9SV-OHRL	OUTSIDE HANDLE ROTARY LATCH KIT (SET OF 2)
9SV-WL2	WINDSHIELD LATCH KIT, SET OF 2
9SW-LATCH	SLIDING WINDOW REPLACEMENT LATCH
9SV-DP10	DOMES PLUG 3/8" (BAG OF 10)
9SV-DP11	DOMES PLUG 1/2" (BAG OF 10)

TRIM LOK, STD, 1/16" - 1/8" GRIP	5/8" STD BULB, 1/16" GRIP	5/8" STD BULB, 1/4" GRIP	3/4" SIDE BULB, 1/4" GRIP	1" SIDE BULB 1/16" GRIP	3/4" SIDE BULB, 1/16" GRIP	1" ROUND BULB, 1/16" GRIP
						
9SV-PRO1-20	9SV-PRO2-15	9SV-PRO7-5	9SV-PRO9-10	9SV-PR16-10	9SV-PR17-20	9SV-PR19-10
1/2" WEATHERSEAL	5/8" SIDE BULB 1/16" GRIP	7/16" SIDE BULB 1/4" GRIP	WINDOW RUBBER	3/4" SIDE BULB, 1/4" GRIP	EXPANDING FOAM 2-3/8" X 3/4"	FOAM TAPE 1/2" X 1/16"
						
9SV-PR20-10	9SV-PR27-5	9SV-PR29-15	9SV-PR31-10	9SV-PR38-15	9SV-PR40-5	9SV-DT-15


OPTIONAL ACCESSORIES

PREMIUM AND STANDARD CABS


FRONT LED WORK LIGHTS
(P/N: 1KAPFXFWL)




REAR LED WORK LIGHTS
(P/N: 1KAPFXRWL)




LED CORNER FLASHER LIGHTS
(P/N: 1KAPFXCFL)




HEATER (P/N: 9PH20S61)




SIDE VIEW MIRRORS (P/N: 9PM5)

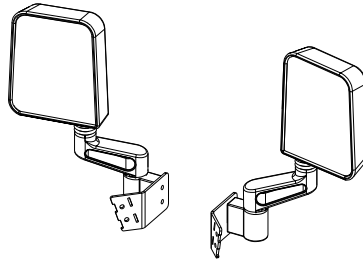


REAR VIEW MIRROR (P/N: 9PM3)



DOME LIGHT (P/N: 9LEDD14)



FRONT WIPER KIT, 172 DEGREE SWEEP, 12V W/ 16" FLEX BLADE (P/N: 1KAPFXWK)

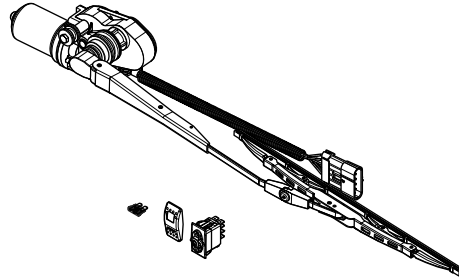




BOLT TORQUE

BOLT TORQUE SPECIFICATIONS

GENERAL TORQUE SPECIFICATION TABLE

Use the following torques when special torques are not given. These values apply to fasteners as received from suppliers, dry, or when lubricated with normal engine oil. They do not apply if special graphited or moly disulphide greases or other extreme pressure lubricants are used. This applies to both UNF and UNC threads. Remember to always use grade five or better when replacing bolts.

IMPORTANT: On all PLATED GRADE 8 bolts, reduce torque 15% from listed bolt torque specification.

SAE Grade No.		2				5				8*			
Bolt head identification mark as per grade. NOTE: Manufacturing Marks Will Vary													
		TORQUE		TORQUE		TORQUE		TORQUE		TORQUE		TORQUE	
Bolt Size		Pounds Feet		Newton-Meters		Pounds Feet		Newton-Meters		Pounds Feet		Newton-Meters	
Inches	Millimeters	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
1/4	6.35	5	6	7	8	9	11	12	15	12	15	16	20
5/16	7.94	10	12	14	16	17	20.5	23	28	24	29	33	39
3/8	9.53	20	23	27	31	35	42	48	57	45	54	61	73
7/16	11.11	30	35	41	47	54	64	73	87	70	84	95	114
1/2	12.70	45	52	61	70	80	96	109	130	110	132	149	179
9/16	14.29	65	75	88	102	110	132	149	179	160	192	217	260
5/8	15.88	95	105	129	142	150	180	203	244	220	264	298	358
3/4	19.05	150	185	203	251	270	324	366	439	380	456	515	618
7/8	22.23	160	200	217	271	400	480	542	651	600	720	814	976
1	25.40	250	300	339	406	580	696	787	944	900	1080	1220	1464
1-1/8	25.58	-	-	-	-	800	880	1085	1193	1280	1440	1736	1953
1-1/4	31.75	-	-	-	-	1120	1240	1519	1681	1820	2000	2468	2712
1-3/8	34.93	-	-	-	-	1460	1680	1980	2278	2380	2720	3227	3688
1-1/2	38.10	-	-	-	-	1940	2200	2631	2983	3160	3560	4285	4827

*Thick Nuts must be used with Grade 8 bolts

METRIC BOLT TORQUE SPECIFICATIONS



Size of Screw	Property Class	Course Thread			Fine Thread		
		Pitch (mm)	Pounds Feet	Newton-Meters	Pitch (mm)	Pounds Feet	Newton-Meters
M6	5.6	1.0	3.6-5.8	4.9-7.9	-	-	-
	8.8		5.8-9.4	7.9-12.7		-	-
	10.9		7.2-10	9.8-13.6		-	-
M8	5.6	1.25	7.2-14	9.8-19	1.0	12-17	16.3-23
	8.8		17-22	23-29.8		19-27	25.7-36.6
	10.9		20-26	27.1-35.2		22-31	29.8-42
M10	5.6	1.5	20-25	27.1-33.9	1.25	20-29	27.1-39.3
	8.8		34-40	46.1-54.2		35-47	47.4-63.7
	10.9		38-46	51.5-62.3		40-52	54.2-70.5
M12	5.6	1.75	28-34	37.9-46.1	1.25	31-41	42-55.6
	8.8		51-59	69.1-79.9		55-68	75.9-92.1
	10.9		57-66	77.2-89.4		62-75	84-101.6
M14	5.6	2.0	49-56	66.4-75.9	1.5	52-64	70.5-86.7
	8.8		81-93	109.8-126		90-106	122-143.6
	10.9		96-109	130.1-147.7		107-124	145-168
M16	5.6	2.0	67-77	90.8-104.3	1.5	69-83	93.6-112.5
	8.8		116-130	157.2-176.2		120-138	162.6-187
	10.9		129-145	174.8-196.5		140-158	189.7-214.1
M18	5.6	2.0	88-100	119.2-136	1.5	100-117	136-158.5
	8.8		150-168	203.3-227.6		177-199	239.8-269.6
	10.9		175-194	237.1-262.9		202-231	273.7-313
M20	5.6	2.5	108-130	146.3-176.2	1.5	132-150	178.9-203.3
	8.8		186-205	252-277.8		206-242	279.1-327.9
	10.9		213-249	288.6-337.4		246-289	333.3-391.6