



Ferris ISX 3300 (p/n: 1FISX33PR)

Cab with A/C

Fits 36HP and 40HP Briggs & Stratton Vanguard
Big Block engines

Fits 60", 61", and 72" side discharge mowers
(Does not fit with bagger systems)

While this cab kit was designed to fit on the vehicle listed above, manufacturing tolerances and vehicle assembly may affect cab fitment. It is the responsibility of the cab installer to check all vehicle pedals and levers for full functionality and, as required, adjust the cab fitment to prevent any interference of the cab components with the travel of pedals or levers.



Premium Cab Shown with Options

Available Options:

1. Side View Mirrors (P/N: 9PM5)
2. Switch Panel (P/N: 1FISX33CK) (required for the following 2 items)
3. Front LED Work Lights (P/N: 1ZTRLK)
4. Front Wiper/Washer Kit (P/N: 1ZTRWK)

Approximate Installation Time *

Experienced Dealer Technician – 4 Hours

Average Dealer Technician – 6 Hours

Do-It-Yourself – 6-8 Hours

(*=Not including accessories)

Approximate Product Specifications

Floorboard to Roof Height: 57 inches

Weight: 252 lbs.

Cab Width: 50 inches

Register your new product quickly online at
Curtiscab.com/product-registration/



Curtis encourages all customers to register their Curtis products. However, failure to do so will not diminish right to warranty. Curtis Industries does not sell or share your information with anyone else.

Download a digital copy of your installation instructions online at Curtiscab.com/literature/



Curtis strives to continuously improve our products, technical documentation, etc. Therefore, the installation manual for this product may have been updated after your product was packaged. The latest revision of the installation manual can always be found at the website above.


The contents of this envelope are the property of the owner. Leave with the owner when installation is complete.

Rev. G, 04/17/2025


p/n: IM-1FISX33PR

SERVICE PARTS


ROOF ASSEMBLY
P/N: 8SV-101-00066

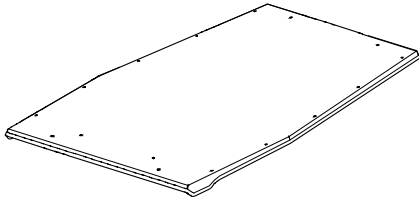


WINDSHIELD ASSEMBLY
P/N: 8SV-102-00040




WINDSHIELD SUPPORT ASSEMBLY
P/N: 8SV-103-00030

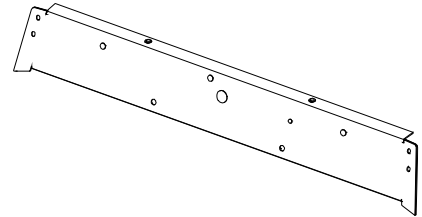


REAR PANEL ASSEMBLY
P/N: 8SV-106-00045

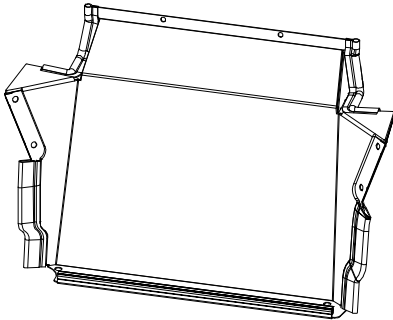


DOOR ASSEMBLY, LEFT
P/N: 8SV-107-00058-L




DOOR ASSEMBLY, RIGHT
P/N: 8SV-107-00058-R




SIDEFRAME ASSEMBLY, LEFT
P/N: 8SV-109-00027-L




SIDEFRAME ASSEMBLY, RIGHT
P/N: 8SV-109-00027-R



FRONT FLOORBOARD ASSEMBLY
P/N: 8SV-105-00035

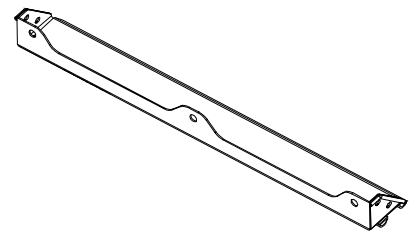


REAR BRACE ASSEMBLY
P/N: 8SV-113-00298



A-PILLAR CLAMP, LEFT
P/N: 8SV-SM-02374-L




A-PILLAR CLAMP, RIGHT
P/N: 8SV-SM-02374-R




SERVICE PARTS


UPPER REAR PANEL
P/N: 8SV-111-00043

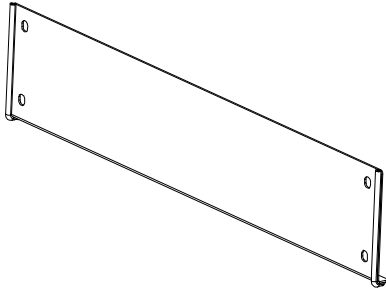


A/C UNIT, REAR MOUNTED
P/N: 8SV-302-00008-BP




A/C COVER ASSEMBLY
P/N: 8SV-303-00013-BP




ROPS MOUNT, LEFT
P/N: 8SV-110-00110-L




ROPS MOUNT, RIGHT
P/N: 8SV-111-00110-R




ROPS CLAMP, LEFT
P/N: 8SV-110-00111-L




ROPS CLAMP, RIGHT
P/N: 8SV-110-00111-R




A/C AIR DIVERTER FLAP
P/N: 8SV-113-00258-BP

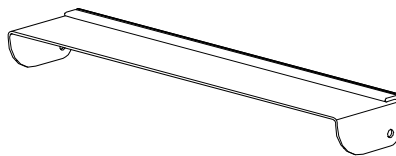


V-BELT
P/N: 9SV-9BLT-15




DYNAMO
P/N: 9SV-9ALT-06



FLYWHEEL STUB SHAFT
P/N: 9SV-MP-00085




REGULATOR/RECTIFIER
P/N: 8SV-114-00041




SERVICE PARTS


FRONT MOUNT BRACKET, LEFT
P/N: 8SV-SM-02296-L




FRONT MOUNT BRACKET, RIGHT
P/N: 8SV-SM-02296-R




COMPRESSOR BRACKET
P/N: 8SV-WA-00567




FLYWHEEL SHROUD MOUNT
P/N: 8SV-113-00312

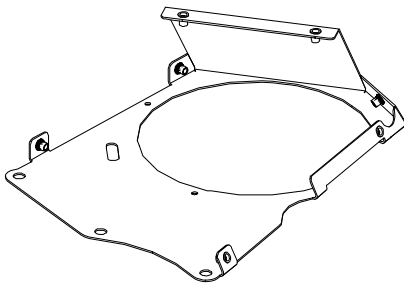


COMPRESSOR DEBRIS COVER
P/N: 8SV-113-00300

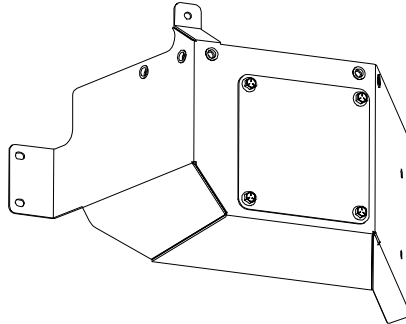


FLYWHEEL SHROUD
P/N: 8SV-113-00342




REGULATOR MOUNT BRACKET
P/N: 8SV-SM-02530




ACCESS COVER, RECHARGE PORT
P/N: 8SV-SM-02449




CRANKSHAFT PULLEY
P/N: 9SV-MP-00083-ZY




A/C COMPRESSOR
P/N: 8SV-9AC-00051

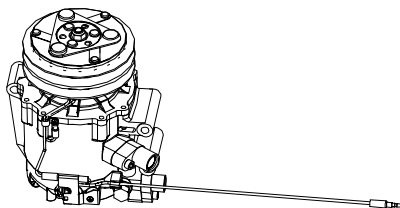

HOSE, #8, COMP TO COND
P/N: 8SV-305-00027

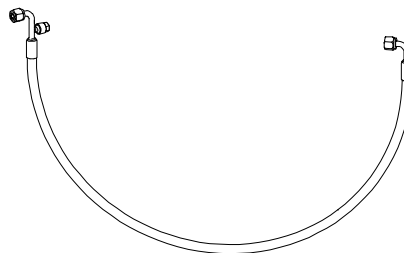


HOSE, #6, DRIER TO EVAP
P/N: 8SV-305-00023

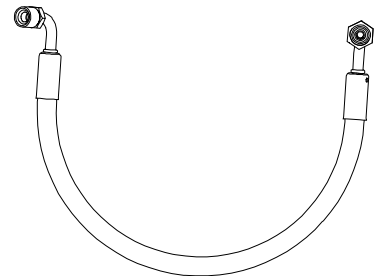


SERVICE PARTS

HOSE, #10 EVAP TO COMP
P/N: 8SV-305-00026

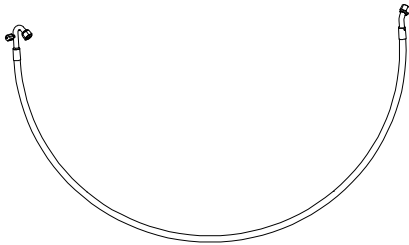


HOSE, #6, COND TO DRYER
P/N: 8SV-305-00025

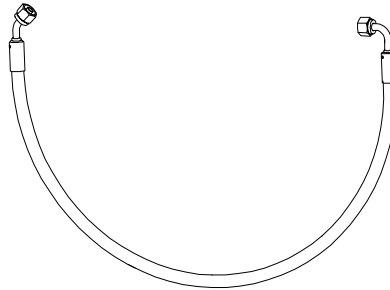


REAR LEG WINDOW, LEFT W/
HARDWARE
P/N: 8SV-P-00161-L




DOOR SKIN, LEFT, W/ HARDWARE
P/N: 8SV-P-00163-L




DOOR SKIN, RIGHT, W/ HARDWARE
P/N: 8SV-P-00163-R




REAR LEG WINDOW, RIGHT W/
HARDWARE
P/N: 8SV-P-00161-R




KNOB
P/N: 9SV-OHC-27



LOUVERED PLUG WITH FILTER
P/N: 9SV-9DP25




EVAPORATOR
P/N: 8SV-9AC-00046

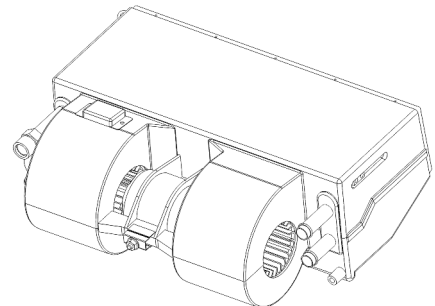


A/C WIRE HARNESS
P/N: 9SV-WH-00148



WIRE HARNESS, A/C DYNAMO
P/N: 9SV-WH-00149




HEADREST MOUNT
P/N: 8SV-SM-02378

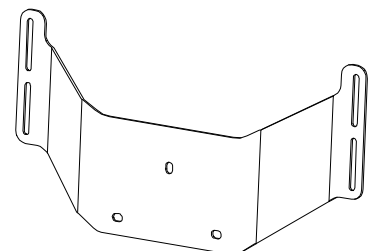


SERVICE PARTS


DECK CONTROL COVER
P/N: 8SV-111-00042

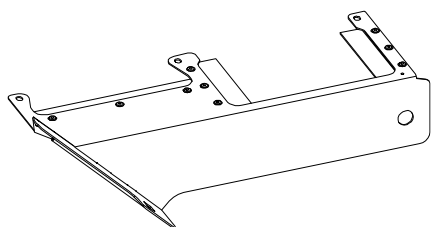


INNER FILLER BRACKET, LEFT
P/N: 8SV-110-00119-L




INNER FILLER BRACKET, RIGHT
P/N: 8SV-110-00119-R

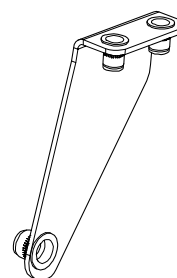


SEAT LEVER SEAL PANEL
P/N: 8SV-111-00049




UNDER SEAT FILLER ASSEMBLY, LEFT
P/N: 8SV-111-00047-L




UNDER SEAT FILLER ASSEMBLY, RIGHT
P/N: 8SV-111-00047-R

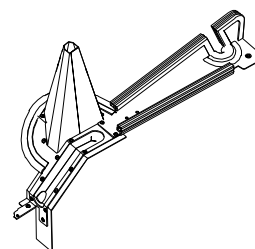


LEFT FLOORBOARD FILL PANEL
P/N: 8SV-SM-02564




DRIVE HANDLE FILLER, LEFT
W/ HARDWARE
P/N: 8SV-112-00083-L




DRIVE HANDLE FILLER, RIGHT
W/ HARDWARE
P/N: 8SV-112-00083-R




PULLEY RETAINING WASHER
P/N: 8SV-SM-02373



AIR FILTER
P/N: 9SV-9HR-00032

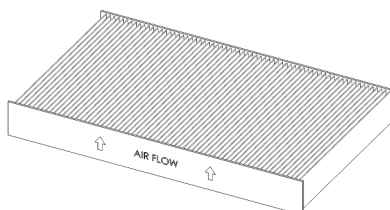


FLOOR MAT, VEHICLE FOOTREST
P/N: 8SV-9FR-00128

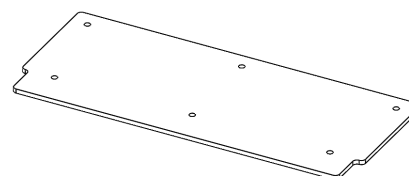


SERVICE PARTS

FLOOR MAT, VEHICLE FLOORBOARD
P/N: 8SV-9FR-00125

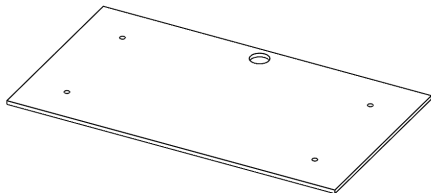

VEHICLE FOOTREST WITH FLOOR MAT
P/N: 8SV-113-00450

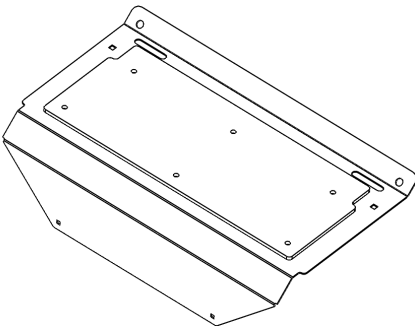

ADDITIONAL SERVICE PARTS

PART NUMBER	DESCRIPTION
9SV-HWK-00187	HARDWARE KIT, PREP AND CAB INSTALL
9SV-HWK-00188	HARDWARE KIT, COVER PANELS
9SV-OHRL-G	OUTSIDE DOOR HANDLE (SET OF 2)
9SV-GH	INTERIOR GRAB HANDLE (SET OF 2)
9SV-HSLP	HINGE PINS AND SLEEVES (2L + 2R)
9SV-DP10	DOMES PLUG, .375" HOLE (BAG OF 10)
9SV-DP16	DOMES PLUG, .750" HOLE (BAG OF 4)
9SV-DP04	DOMES PLUG, 1.125" HOLE (BAG OF 15)
9SV-9OR-01	O-RINGS, (INCL 1 OF EA: .301" ID .426" ID .551" ID)
9SV-GS02A	BALL STUD 10MM (BAG OF 10)
9SV-DL06S	INTERIOR DOOR LATCH W/COVER (1L +1R)
9SV-9AC-00001	CONDENSER
9SV-85-01-0022	RELAY, 12V, 20/40A, SPDT, MINI ISO
9SV-9AC-00003	DRIER RECEIVER
9SV-9AC-00005	PRESSURE SWITCH, 2-28KG/CM2
9SV-9AC-00007	AXIAL FAN FOR CONDENSER
9SV-DSTRH	DOOR STRIKER PIN (BAG OF 5)
9SV-GS02Q	GAS SHOCK 12-3/8" (SET OF 2)

TRIM LOK, STD,
1/16" - 1/8" GRIP



9SV-PRO1-20

5/8" STD BULB,
1/16" GRIP



9SV-PRO2-15

1" FLAT BULB
1/16" GRIP



9SV-PRO5-10

5/8" STD BULB
3/16" GRIP




9SV-PRO7-5

ARCH RUBBER
P.S.A.



9SV-PRO9-10

3/4" SIDE BULB,
1/16" GRIP



9SV-PR17-20

1" ROUND BULB,
1/16" GRIP



9SV-PR19-10

1/2"
WEATHERSEAL



9SV-PR20-10

FOAM TAPE,
1/8" X 2"



9SV-PR35-5

3/4" SIDE BULB,
1/4" GRIP



9SV-PR38-15

ARCH PSA,
.20" X .15"



9SV-PR53-15

BOLT TORQUE

BOLT TORQUE SPECIFICATIONS

GENERAL TORQUE SPECIFICATION TABLE

Use the following torques when special torques are not given. These values apply to fasteners as received from suppliers, dry, or when lubricated with normal engine oil. They do not apply if special graphited or moly disulphide greases or other extreme pressure lubricants are used. This applies to both UNF and UNC threads. Remember to always use grade five or better when replacing bolts.

IMPORTANT: On all PLATED GRADE 8 bolts, reduce torque 15% from listed bolt torque specification.

SAE Grade No.		2				5				8*			
Bolt head identification mark as per grade. NOTE: Manufacturing Marks Will Vary						  				  			
Bolt Size		TORQUE				TORQUE				TORQUE			
		Pounds Feet		Newton-Meters		Pounds Feet		Newton-Meters		Pounds Feet		Newton-Meters	
Inches	Millimeters	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.	Min.	Max.
1/4	6.35	5	6	7	8	9	11	12	15	12	15	16	20
5/16	7.94	10	12	14	16	17	20.5	23	28	24	29	33	39
3/8	9.53	20	23	27	31	35	42	48	57	45	54	61	73
7/16	11.11	30	35	41	47	54	64	73	87	70	84	95	114
1/2	12.70	45	52	61	70	80	96	109	130	110	132	149	179
9/16	14.29	65	75	88	102	110	132	149	179	160	192	217	260
5/8	15.88	95	105	129	142	150	180	203	244	220	264	298	358
3/4	19.05	150	185	203	251	270	324	366	439	380	456	515	618
7/8	22.23	160	200	217	271	400	480	542	651	600	720	814	976
1	25.40	250	300	339	406	580	696	787	944	900	1080	1220	1464
1-1/8	25.58	-	-	-	-	800	880	1085	1193	1280	1440	1736	1953
1-1/4	31.75	-	-	-	-	1120	1240	1519	1681	1820	2000	2468	2712
1-3/8	34.93	-	-	-	-	1460	1680	1980	2278	2380	2720	3227	3688
1-1/2	38.10	-	-	-	-	1940	2200	2631	2983	3160	3560	4285	4827

*Thick Nuts must be used with Grade 8 bolts

METRIC BOLT TORQUE SPECIFICATIONS

		5.6			8.8			10.9		
Size of Screw	Property Class	Course Thread			Fine Thread					
		Pitch (mm)	Pounds Feet	Newton-Meters	Pitch (mm)	Pounds Feet	Newton-Meters			
M6	5.6	1.0	3.6-5.8	4.9-7.9	-	-	-			
	8.8		5.8-9.4	7.9-12.7		-	-			
	10.9		7.2-10	9.8-13.6		-	-			
M8	5.6	1.25	7.2-14	9.8-19	1.0	12-17	16.3-23			
	8.8		17-22	23-29.8		19-27	25.7-36.6			
	10.9		20-26	27.1-35.2		22-31	29.8-42			
M10	5.6	1.5	20-25	27.1-33.9	1.25	20-29	27.1-39.3			
	8.8		34-40	46.1-54.2		35-47	47.4-63.7			
	10.9		38-46	51.5-62.3		40-52	54.2-70.5			
M12	5.6	1.75	28-34	37.9-46.1	1.25	31-41	42-55.6			
	8.8		51-59	69.1-79.9		55-68	75.9-92.1			
	10.9		57-66	77.2-89.4		62-75	84-101.6			
M14	5.6	2.0	49-56	66.4-75.9	1.5	52-64	70.5-86.7			
	8.8		81-93	109.8-126		90-106	122-143.6			
	10.9		96-109	130.1-147.7		107-124	145-168			
M16	5.6	2.0	67-77	90.8-104.3	1.5	69-83	93.6-112.5			
	8.8		116-130	157.2-176.2		120-138	162.6-187			
	10.9		129-145	174.8-196.5		140-158	189.7-214.1			
M18	5.6	2.0	88-100	119.2-136	1.5	100-117	136-158.5			
	8.8		150-168	203.3-227.6		177-199	239.8-269.6			
	10.9		175-194	237.1-262.9		202-231	273.7-313			
M20	5.6	2.5	108-130	146.3-176.2	1.5	132-150	178.9-203.3			
	8.8		186-205	252-277.8		206-242	279.1-327.9			
	10.9		213-249	288.6-337.4		246-289	333.3-391.6			